
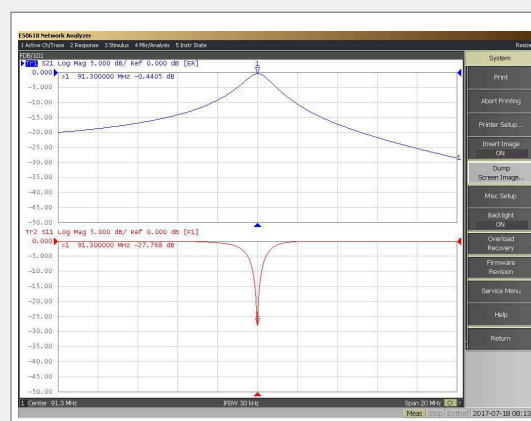
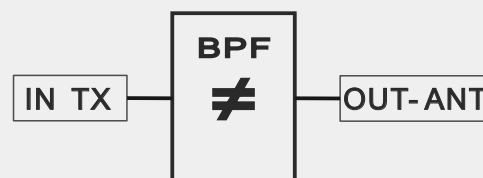


FDB/101-N

FM SINGLE CAVITY FILTER

FEATURES

- FM SINGLE CAVITY FILTER
- CONNECTORS IN/OUT N
- VARIABLE BANDWIDTH
- EXTERNAL BODY IN ALUMINUM
- INTERNAL LINES SILVER PLATED
- RACK VERSION, 19" 3U

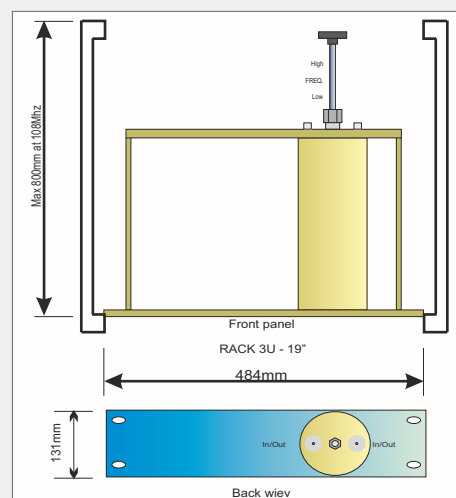

TECHNICAL DATA


| | |
|--|---------------|
| Frequency Range | 87.5 - 108Mhz |
| In and Out Impedance | 50ohm |
| Return Loss | ≥ 30 dB |
| Attenuation | ≤ 0.5 dB |
| Power * | 100W |
| Working Temperature | -10 to 45°C |
| External Dimensions | 80x49x13cm |
| Weight | 7Kg |
| * at max eight above sea level of 1500mt | |

FDB/102-N

FM DOUBLE CAVITY FILTER



FEATURES

- FM DOUBLE CAVITY FILTER
- CONNECTORS IN/OUT N
- VARIABLE BANDWIDTH
- EXTERNAL BODY IN ALUMINUM
- INTERNAL LINES SILVER PLATED
- RACK VERSION, 19" 3U

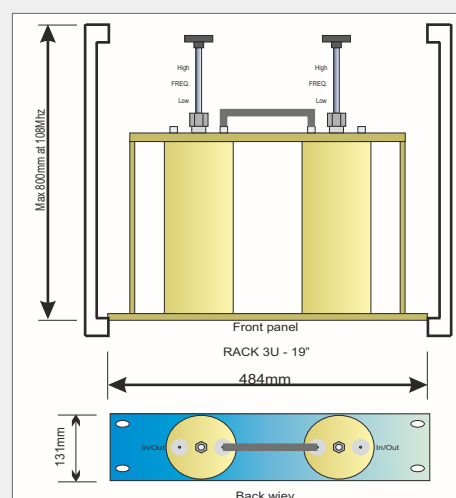

TECHNICAL DATA

| | |
|--|---------------|
| Frequency Range | 87.5 - 108Mhz |
| In and Out Impedance | 50ohm |
| Return Loss | ≥ 30 dB |
| Attenuation | ≤ 0.6 dB |
| Power * | 200W |
| Working Temperature | -10 to 45°C |
| External Dimensions | 80x49x13cm |
| Weight | 12Kg |
| * at max eight above sea level of 1500mt | |

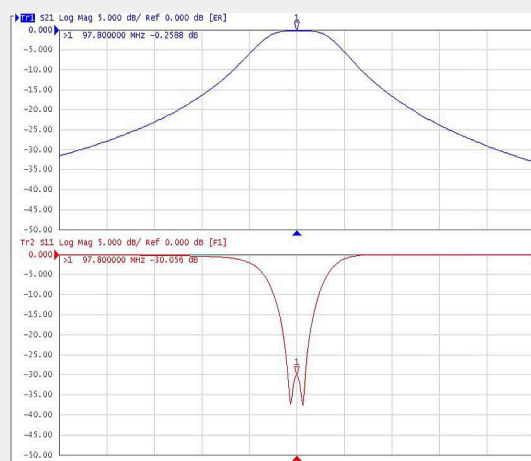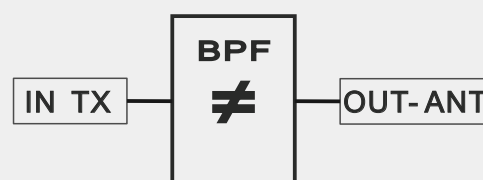


FDB/103-N

FM TRIPLE CAVITY FILTER

FEATURES

- FM TRIPLE CAVITY FILTER
- RACK VERSION, 19" 6U
- CONNECTORS IN/OUT N
- VARIABLE BANDWIDTH
- EXTERNAL BODY IN ALUMINUM
- INTERNAL LINES SILVER PLATED

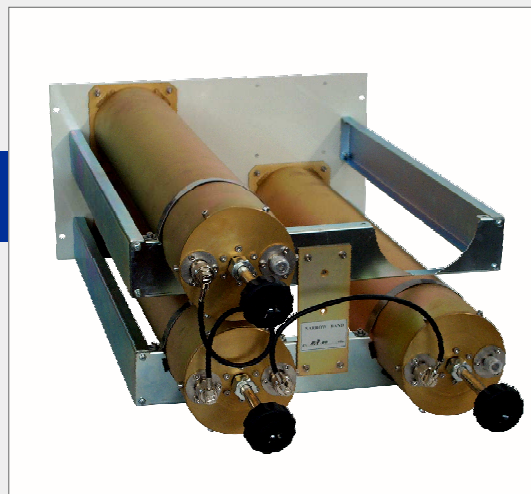

TECHNICAL DATA

| | |
|--|---------------|
| Frequency Range | 87.5 - 108Mhz |
| In and Out Impedance | 50ohm |
| Return Loss | ≥ 30dB |
| Attenuation | ≤ 0.6dB |
| Power * | 250W |
| Working Temperature | -10 to 45°C |
| External Dimensions | 49x80x26cm |
| Weight | 19Kg |
| * at max eight above sea level of 1500mt | |

