

Compact Desktop
Power Supply

POWER 600 W

Main features

- Adjustable output voltage
 12-15V, MAX. 40A
- Deadly Quiet
- Highly efficient
- Lightweight and compact
- DXpeditions compatible
- Tolerant to gasoline generators
- Saves space with flexible orientation
- 4 USB ports with quick charge 2.0

Applications

- Mechanical & electrical equipment sourcing
- Low noise low power amplifiers
- Power sourcing for PoE systems
- Amateur radio
- Lab equipment
- Telecom
- □YI

Slick

Flexibility: The flexible orientation and multiple connectivity options make it easy to use

silent

Quiet Operation: The low EMI and acoustic noise minimize distractions

supply

Potent Power Delivery: Revel in an amped-up 600W power output

Nonstop rapid charging: 4 USB ports with Quick Charge QS2.0

Safety: The Intelligent Protection System protects your devices from damage


Custom voltage setting: Adjustable
Output Voltage allows easy
modification of the power supply to
match the characteristics of
different devices









Compact Desktop Power Supply



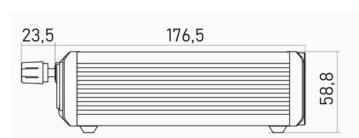



Specifications

Rated power	600W	
Rated current	40A	
Output voltage	13.8V (12-15V Software adjustable)	
Ripple (maximum)	200mVp-p	
Input AC voltage	80V to 264V	
Input AC frequency	47Hz to 63Hz	
AC current (maximum)	6.4A @ 115VAC 3.2A @ 230VAC	
Inrush current (maximum)	40A @ 115VAC; 80A @ 230VAC	
USB Charging Ports	5V/2.5A, 9V/2.5A, 12V/2.5A	
Overvoltage protection	Yes	
Overtemperature protection	Yes	
Overcurrent protection	Yes	
Short circuit protection	Yes	
Operating temperature range	-20°C to +70°C -4°F to 158°F	
Storage temperature range	-40°C to +85°C -40°F to 185°F	
EMC	EN IEC 61000-6-3:2021; EN IEC 61000-6-1:2019	
Dimensions	172mm x 55mm x 185mm 6.8"	x 2" x 7.3"
Weight	1.1kg 2 lb	7oz
Acoustic noise	~21 dBa	

